

The exhibits in this section demonstrate the hydrologic setting of the Chino Basin and its importance to water supply and groundwater management within the Basin.

The Chino Basin covers about 240 square miles and is located centrally within the Santa Ana River Watershed. Exhibit 3 shows the location of the Chino Basin within the context of the upper portion of the Santa Ana River Watershed. The Santa Ana River flows southwest through the Chino Basin from the Riverside Narrows to the Prado Dam. Downstream of Prado Dam, the Santa Ana River flows through the Orange County Basin and out to the ocean. In total, the drainage area of the Santa Ana River Watershed prior to Prado Dam is about 1,490 square miles. In Chino Basin the following streams are tributary to the Santa Ana River: San Sevaine Creek, Day Creek, Deer Creek, Cucamonga Creek, and San Antonio/Chino Creek. These tributaries generally flow from north to south. The time of concentration¹ for the Santa Ana River at Riverside Narrows is estimated to be between one to two days. By contrast the time of concentration for tributaries that flow from north to south in the Chino Basin is a few hours.

Exhibit 3 shows the locations of three San Bernardino County Flood Control District (SBCFCD) precipitation stations: the San Bernardino Hospital station, located centrally in the Santa Ana River Watershed tributary to the Chino Basin; an Ontario hybrid station (combined records of SBCFCD 1017 and 1075), located in the central Chino Basin; and the Montclair station, located in the northwestern portion of the Basin. Exhibit 3 also shows the U.S. Geological Survey's stream-gaging stations on the Santa Ana River at Riverside Narrows (*SAR at MWD Xing*) and below Prado Dam (*SAR at Below Prado Dam*).

Precipitation is a major source of groundwater recharge in the Chino Basin; thus, the magnitude and temporal pattern of this recharge can be understood by analyzing long-term precipitation records. In Exhibit 4, annual precipitation totals are plotted from the Ontario station (1915 to 2010) and the San Bernardino Hospital station (1901 to 2010). Exhibit 4 characterizes the long-term precipitation trends within and upstream of the Chino Basin. The mean annual precipitation totals at the Ontario and San Bernardino Hospital stations are 15.41 inches and 16.38 inches, respectfully. Exhibit 4 also includes a plot of the cumulative departure from mean

¹The time of concentration is the time it takes for runoff from the most distant upstream part of the watershed to reach a specified point of interest.


precipitation (CDFM), which is used to characterize the occurrence and magnitude of the wet and dry periods. Positive sloping segments of the CDFM plot (trending upward to the right) indicate wet periods, and negative sloping segments of the CDFM plot (trending downward to the right) indicate dry periods. The longest dry period for the 1900 to 2010 historical record is from 1945 to 1976—a 32 year period.

The safe yield of the Chino Basin was computed for the stipulated Judgment in 1978. The base period used to compute the safe yield was 1965 through 1974, a period of ten years. This base period had two years of above average precipitation, eight years of below average precipitation, and falls within the 1945 through 1976 dry period. The average annual precipitation for the base period was 14.64 inches, or 0.77 inches less than the long-term annual average. The post-Peace-Agreement period runs from July 2000 to present, an eleven-year period. The post-Peace-Agreement period contains three years of above-average precipitation and eight years below average precipitation. The average annual precipitation during the post-Peace-Agreement period is 13.32 inches, or 2.09 inches less than the long-term annual average, which is comparable to the 1945 through 1976 dry period. Recharge from precipitation during the base period in which the safe yield was initially estimated—and the post-Peace-Agreement period, are less than average; thus the yield developed during these periods is likely less than the yield that would be developed from a longer more hydrologically representative period.

Exhibit 5 shows the historical relationship between precipitation and storm water discharge in the Chino Basin and uses a double-mass curve analysis to illustrate the change in the precipitation-discharge relationship. A double-mass analysis is an arithmetic plot of the accumulated values of observations for two related variables that are paired in time and thought to be related. As long as the relationship between those two variables remains constant, the double-mass curve will appear as a straight line (constant slope). A change in slope indicates that the relationship has changed; the break in slope denotes the timing of that change.

Specifically, in Exhibit 5, the double-mass curve analysis was used to look at precipitation versus storm water discharge reckoned at Prado Dam (*SAR at Below Prado Dam*), and precipitation versus storm water discharge generated between Riverside Narrows and Prado Dam (storm water reckoned at *SAR at Below Prado Dam* minus storm water reckoned at *SAR at MWD Xing*). In each plot, the slope of the double-mass curve after water year 1976/77 is much steeper than prior years. The change in curvature suggests that a significant change occurred in the precipitation-discharge relationship: there is an

increase in the magnitude of storm water discharge starting in the late 1970s. This increase in storm water discharge is due to land surface modifications caused by the conversion from agricultural to urban uses, the rapid post-1969 lining of stream channels in the Chino Basin and elsewhere in the upper Santa Ana Watershed, and other associated drainage system modifications. The hydrologic effects of land use changes and channel lining were apparently masked by the below average precipitation years that preceded the 1978 through 1983 wet period. These charts indicate that storm water recharge in the Chino Basin declined as the channels were lined and that storm water available for recharge in the Basin has increased significantly with the urbanization. In fact, the average annual decrease in storm water recharge due to lining of stream channels in the Chino Basin was recently estimated to be about 16,000 acre-ft/yr (WEI, 2010).

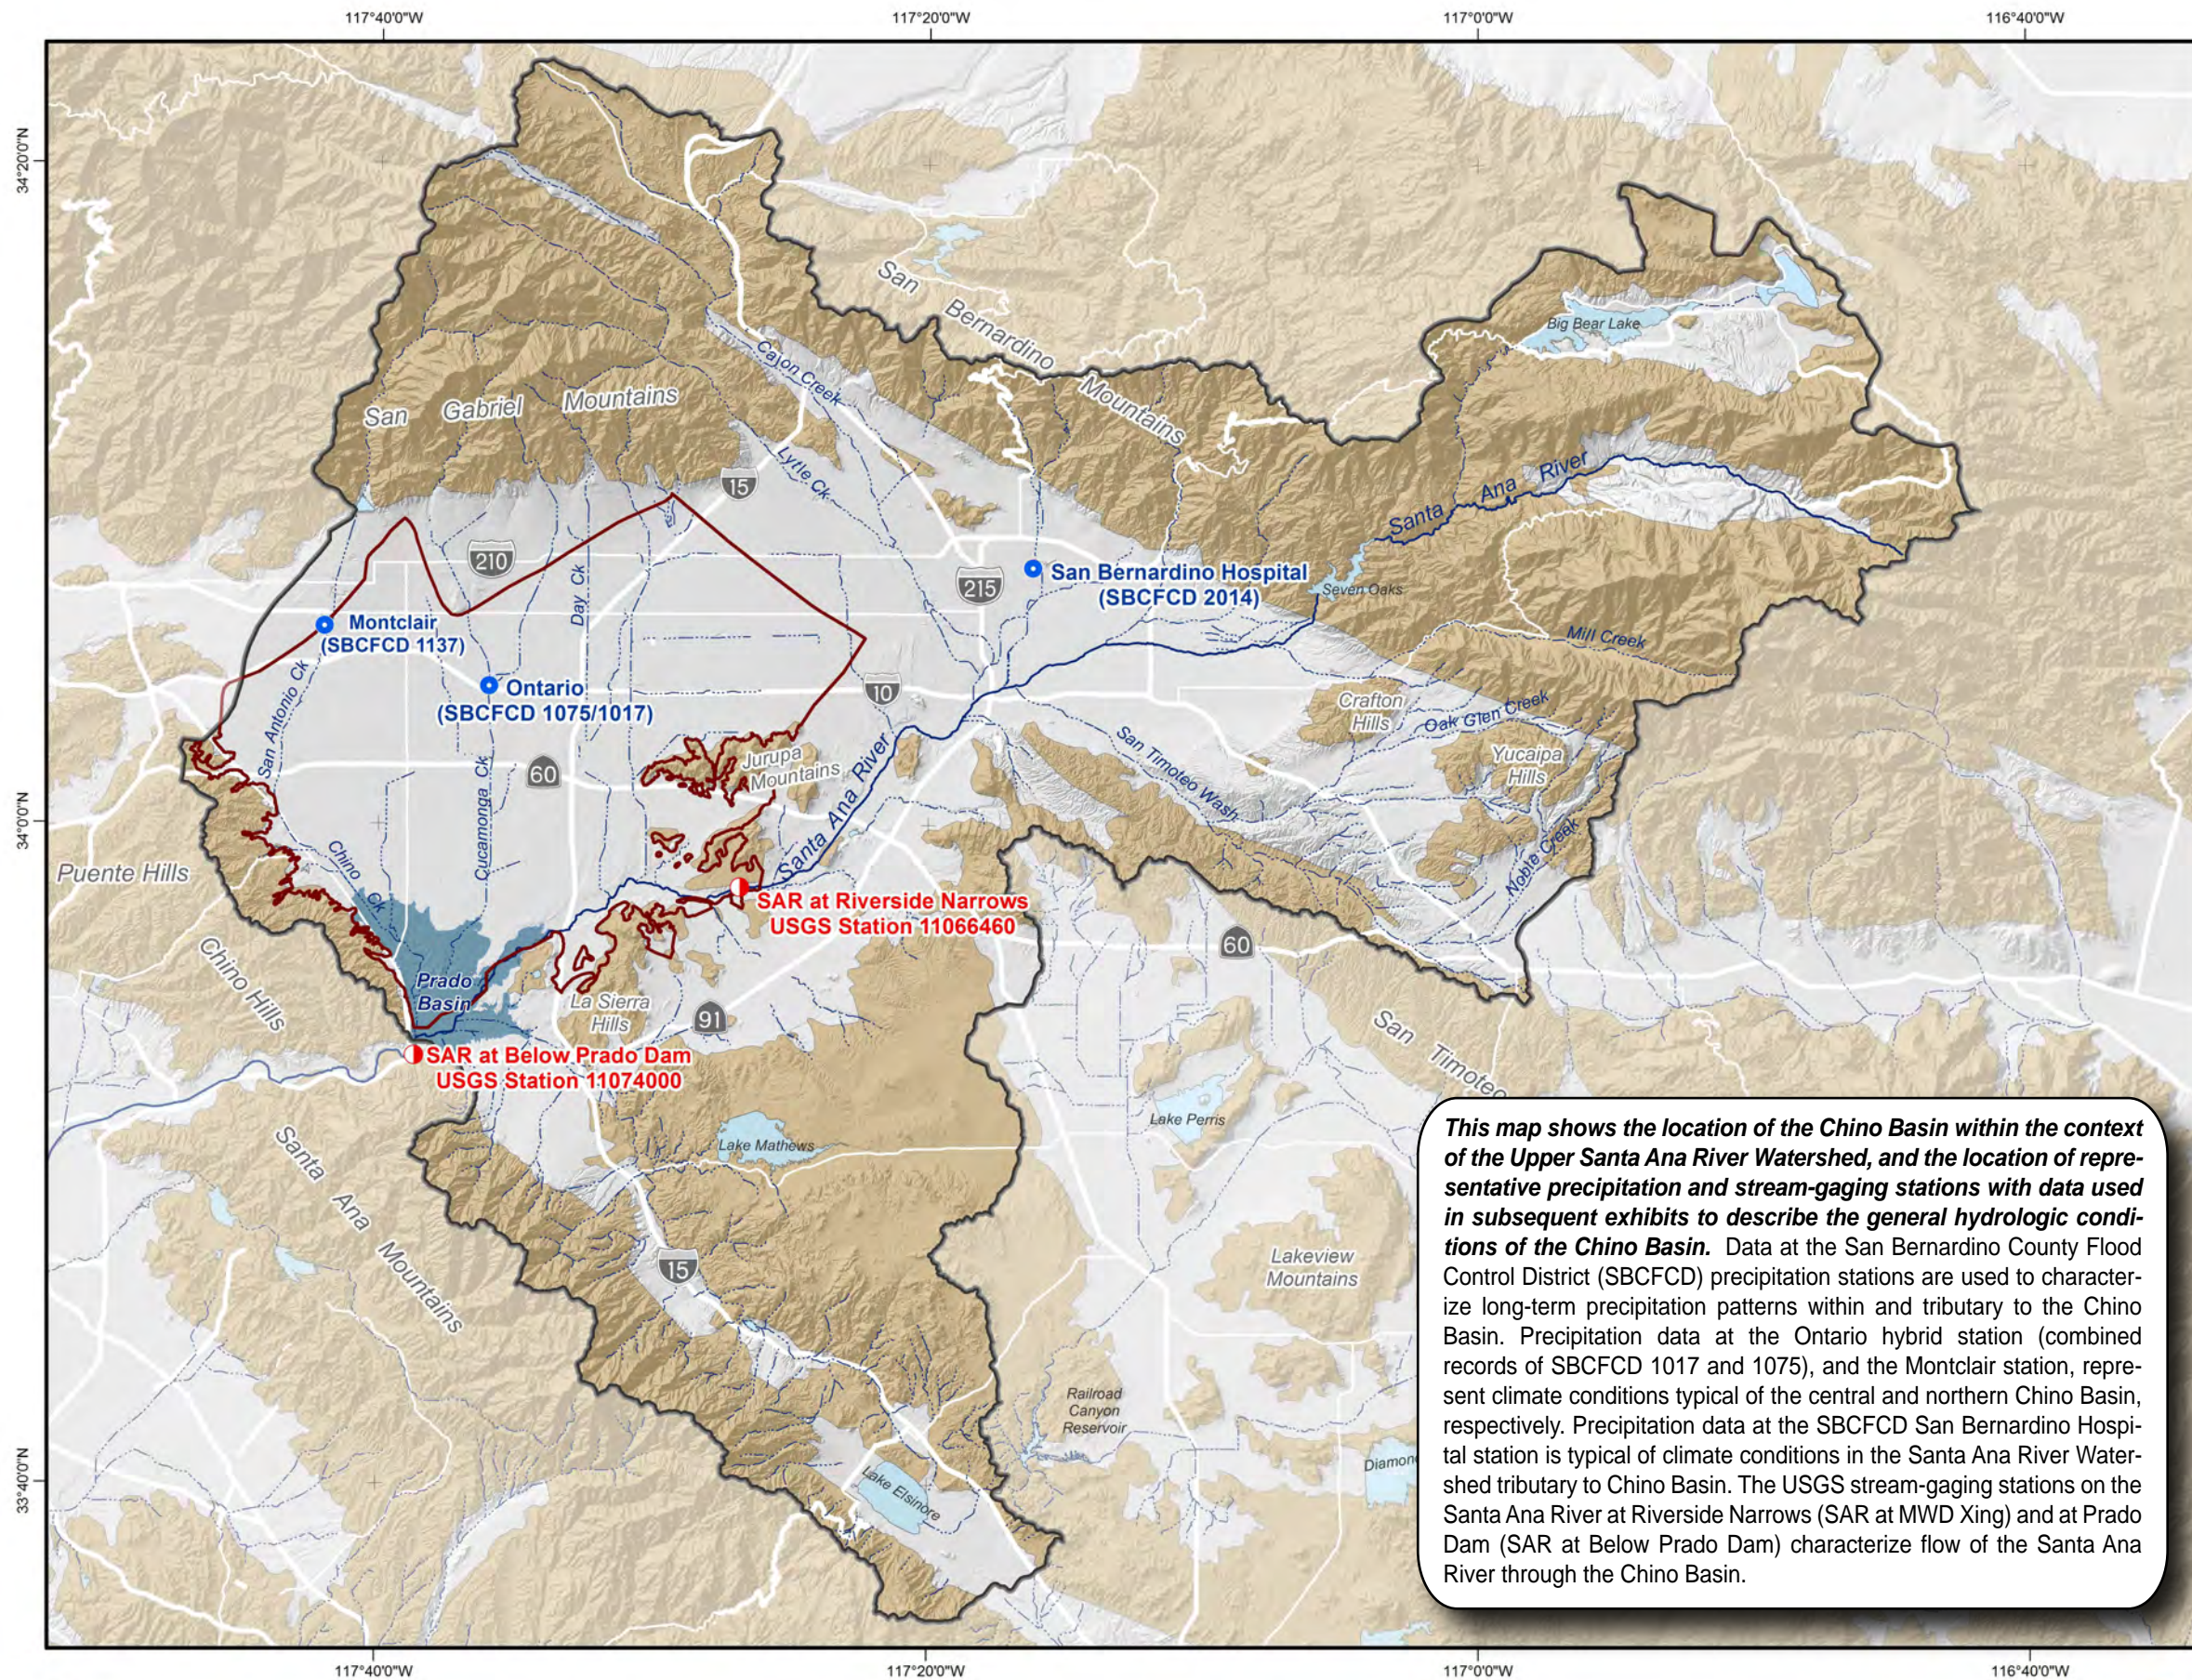


- SBCFCD Precipitation Station
 - USGS Stream-gaging Station
 - Santa Ana River Watershed Tributary to Prado Dam (Upper Watershed)
 - Chino Basin Hydrologic Boundary
 - Streams & Flood Control Channels
 - Santa Ana River
 - Lakes and Reservoirs
 - Prado Basin
- Geology**
- Water-Bearing Sediments*
- Quaternary Alluvium
- Consolidated Bedrock*
- Undifferentiated Pre-Tertiary to Early Pleistocene Igneous, Metamorphic, and Sedimentary Rocks

This map shows the location of the Chino Basin within the context of the Upper Santa Ana River Watershed, and the location of representative precipitation and stream-gaging stations with data used in subsequent exhibits to describe the general hydrologic conditions of the Chino Basin. Data at the San Bernardino County Flood Control District (SBCFCD) precipitation stations are used to characterize long-term precipitation patterns within and tributary to the Chino Basin. Precipitation data at the Ontario hybrid station (combined records of SBCFCD 1017 and 1075), and the Montclair station, represent climate conditions typical of the central and northern Chino Basin, respectively. Precipitation data at the SBCFCD San Bernardino Hospital station is typical of climate conditions in the Santa Ana River Watershed tributary to Chino Basin. The USGS stream-gaging stations on the Santa Ana River at Riverside Narrows (SAR at MWD Xing) and at Prado Dam (SAR at Below Prado Dam) characterize flow of the Santa Ana River through the Chino Basin.





Produced by:
WILDERMUTH ENVIRONMENTAL INC.
 23692 Birtcher Drive
 Lake Forest, CA 92630
 949.420.3030
 www.wildermuthenvironmental.com

Author: MAB
 Date: 20110627
 File: Exhibit_3.mxd

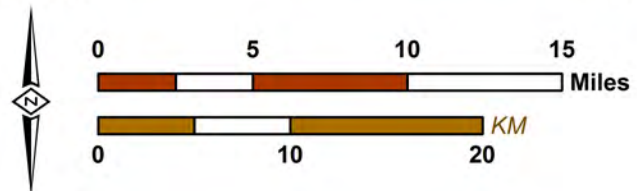

2010 State of the Basin
 General Hydrologic Conditions

Santa Ana River Watershed Tributary to Prado Dam

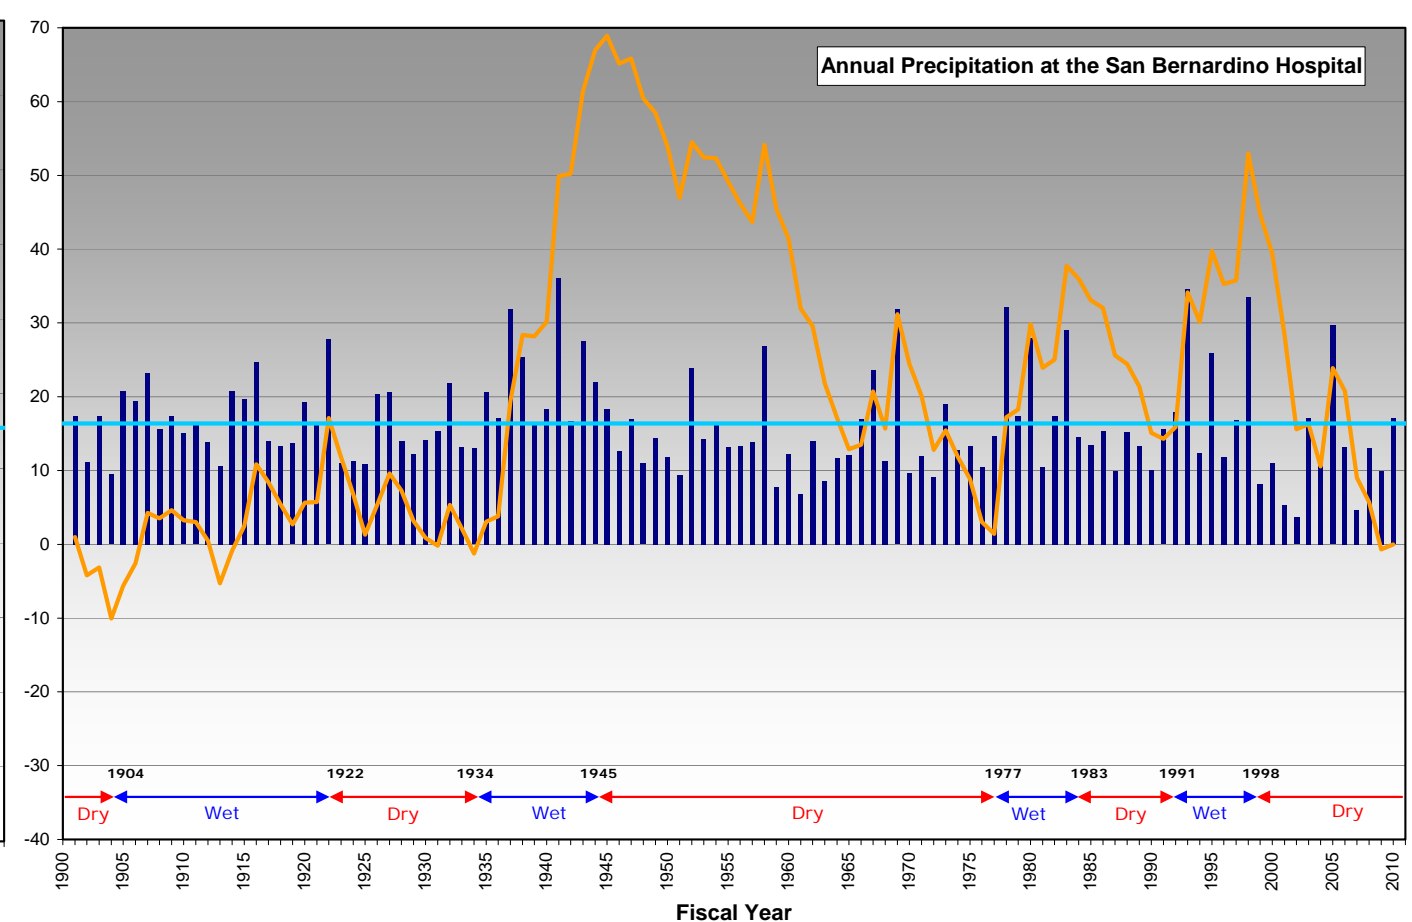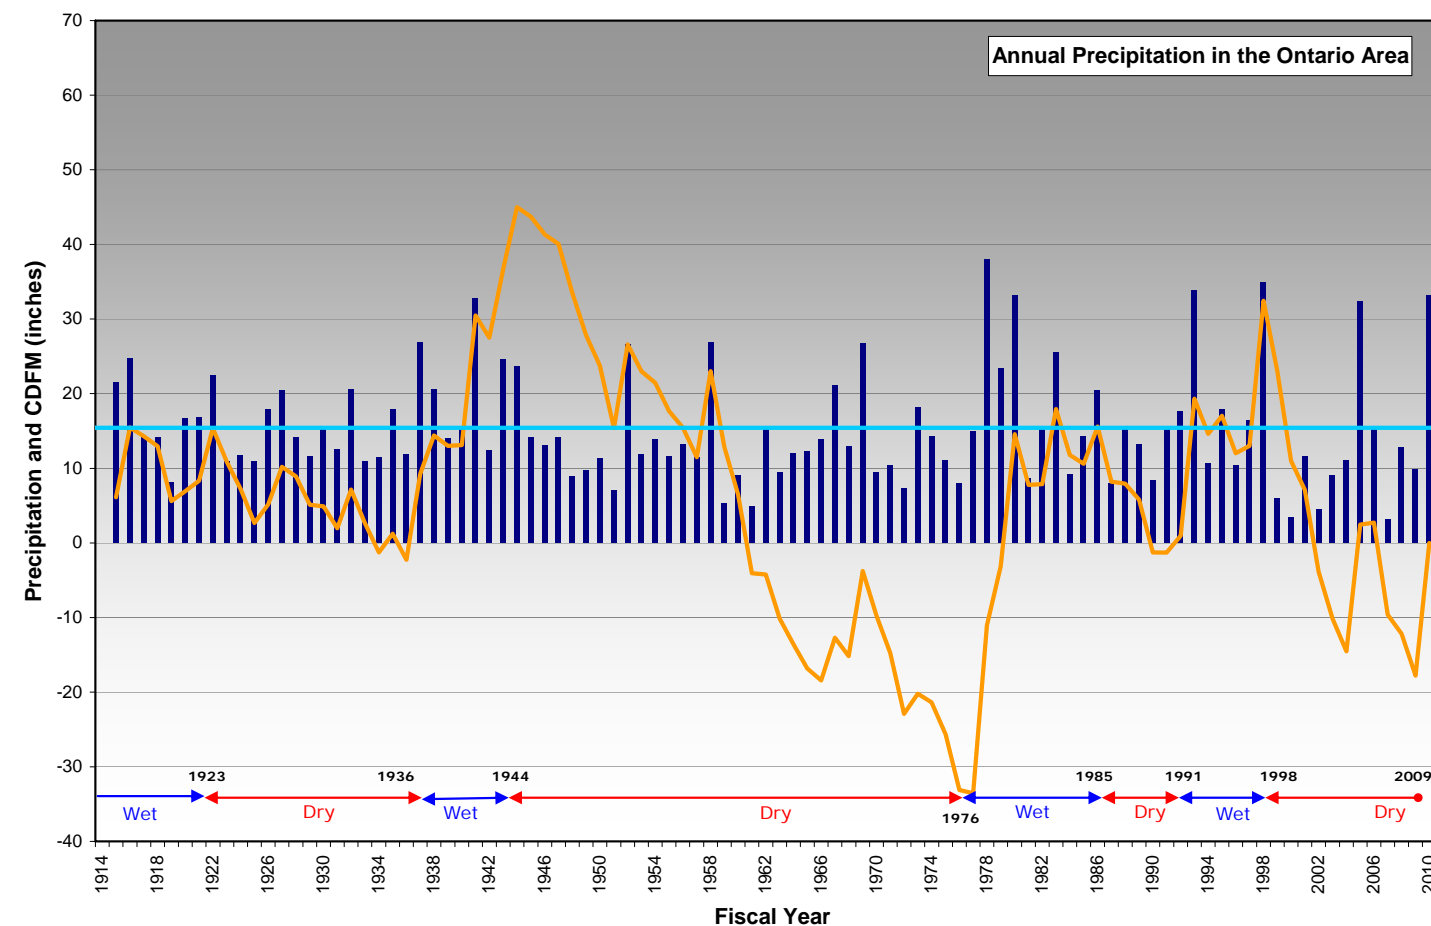

Annual Statistics of Long-Term Precipitation Records (inches)

Statistics	Ontario Area*	San Bernardino Hospital
Period of Record (Fiscal Year)	1915 to 2010	1901 to 2010
Mean	15.41	16.36
Minimum	3.09	3.61
Maximum	37.92	36.10
Standard Deviation	7.56	6.70
Mean + 1 Standard Deviation	22.97	23.06
Coefficient of variation	49%	41%

*Note: Two precipitation stations in the Ontario Area (SBCFCD 1075 and 1017) were combined to create a long-term record. These two precipitation stations are in close proximity to each other, and their overlapping records are highly correlated. Recent data is from SBCFCD Station 1017.

The Chino Basin has a semi-arid Mediterranean climate. Precipitation is a major source of groundwater recharge for the Basin; thus, the magnitude and temporal pattern of this recharge can be understood by analyzing long-term precipitation records. Shown here are the long-term precipitation records for the Ontario Area (located centrally within the Chino Basin) and the San Bernardino Hospital (located within the Santa Ana River Watershed, upstream of the Chino Basin). These figures show the fiscal year annual precipitation totals, long-term average annual precipitation, and the cumulative departure from mean precipitation (CDFM). **The CDFM plot is a useful way to characterize the occurrence and magnitude of wet and dry periods: positive sloping segments (trending upward to the right) indicate wet periods, and negative sloping segments (trending downward to the right) indicate dry periods.** In the Ontario area, four series of wet-dry cycles are apparent: prior to 1914 through 1936, 1937 through 1976, 1977 through 1991, and 1992 through 2009. The record of the San Bernardino Hospital station shows the same pattern of wet-dry cycles. The ratio of dry years to wet years is about three to two. That is, for every ten years, about six years will have below average precipitation and four years will have greater than average precipitation. That said, the 1945 through 1976 dry period is 32 years long. During this dry period, in the Ontario area there were 26 dry years to 6 wet years, averaging about 2.38 inches/year below the average annual precipitation, and at the San Bernardino station, there were 24 dry years to 8 wet years, averaging about 2 inches/year below the average annual precipitation.

The base period used to compute the safe yield of the Chino Basin in the 1978 Judgment was 1965 through 1974, a period of ten years. This base period had three years of above-average precipitation and seven years of below-average precipitation, and falls within the 1945 through 1976 dry period. The average annual precipitation for the base period was 14.64 inches, or 0.77 inches less than the long-term annual average. The post-Peace-Agreement period runs from July 2000 to present, an eleven-year period. The post-Peace-Agreement period contains three above-average precipitation years: 2005, 2006, and 2010; the remaining years had below average precipitation. The average annual precipitation during the post Peace Agreement period was 13.32 inches, or 2.09 inches less than the long-term annual average, which is comparable to the 1945 through 1976 dry period. **One of the takeaways from these charts is that the recharge from precipitation during the base period in which the safe yield was initially estimated—and the post-Peace-Agreement period, should be less than average; thus, the yield developed during these periods is likely less than the yield that would be developed from a longer more hydrologically-representative period.**

Produced by:

WILDERMUTH ENVIRONMENTAL INC.
 23692 Birtcher Drive
 Lake Forest, CA 92630
 949.420.3030
 www.wildermuthenvironmental.com
 Author: SSA/VMW
 Date: 20110620
 File: Exhibit_4.grf

— Cumulative Departure from Mean Precipitation
 — Annual Precipitation


— Long-Term Average Precipitation



2010 State of the Basin
 General Hydrologic Conditions

Long-Term Precipitation Within and Upstream of the the Chino Basin



Exhibit 4

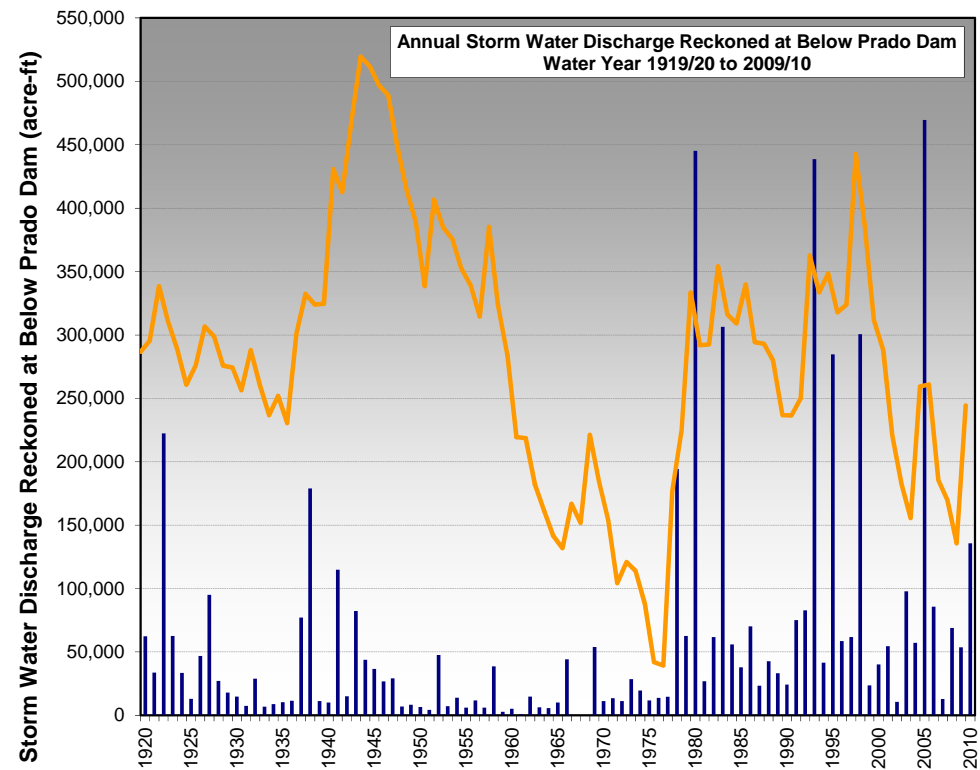

*Storm Water Discharge data at Below Prado Dam is not available for 1967 or 1968

As seen in the graph entitled Annual Storm Water Discharge Reckoned at Below Prado Dam, around water year 1976/77, the relationship of precipitation to storm water discharge changed significantly such that there was more discharge per unit of precipitation produced after this time (compare the amount of storm water runoff for the 1936 to 1944 wet period with the 1977 to 1983 wet period).

A double-mass curve analysis can illustrate the change in the precipitation-runoff relationship. **A double-mass curve analysis is an arithmetic plot of the accumulated values of observations for two related variables that are paired in time and thought to be related.** As long as the relationship between those two variables remains constant, the double-mass curve will appear as a straight line (constant slope). A change in slope indicates that the relationship has changed; the break in slope denotes the timing of that change. Shown here are double-mass curves of precipitation at stations in and around the Chino Basin versus: storm water discharge reckoned at Below Prado Dam; and storm water discharge generated between Riverside Narrows and Prado Dam (storm water discharge reckoned at SAR at Below Prado Dam minus storm water discharge reckoned at SAR at MWD Xing). Note that in each plot, the slope of the double-mass curve after water year 1976/77 is much steeper than prior years. The change in curvature suggests that a significant change occurred in the precipitation-discharge relationship: there is an increase in the magnitude of storm water discharge starting in the late 1970s. This increase in storm water discharge is due to land surface modifications caused by the conversion from agricultural to urban uses, the rapid post-1969 lining of stream channels in the Chino Basin and elsewhere in the upper Santa Ana Watershed, and other associated drainage system improvements. The hydrologic effects of the land use changes and channel lining were apparently masked by the below average precipitation years preceding the 1977 through 1983 wet period. **These charts indicate that storm water recharge in the Chino Basin declined as the channels were lined and that the storm water available in the Basin for recharge has increased significantly with the urbanization.** The average annual decrease in storm water recharge due to the lining of stream channels in the Chino Basin was estimated to be about 16,000 acre-ft/yr (WEI, 2010).

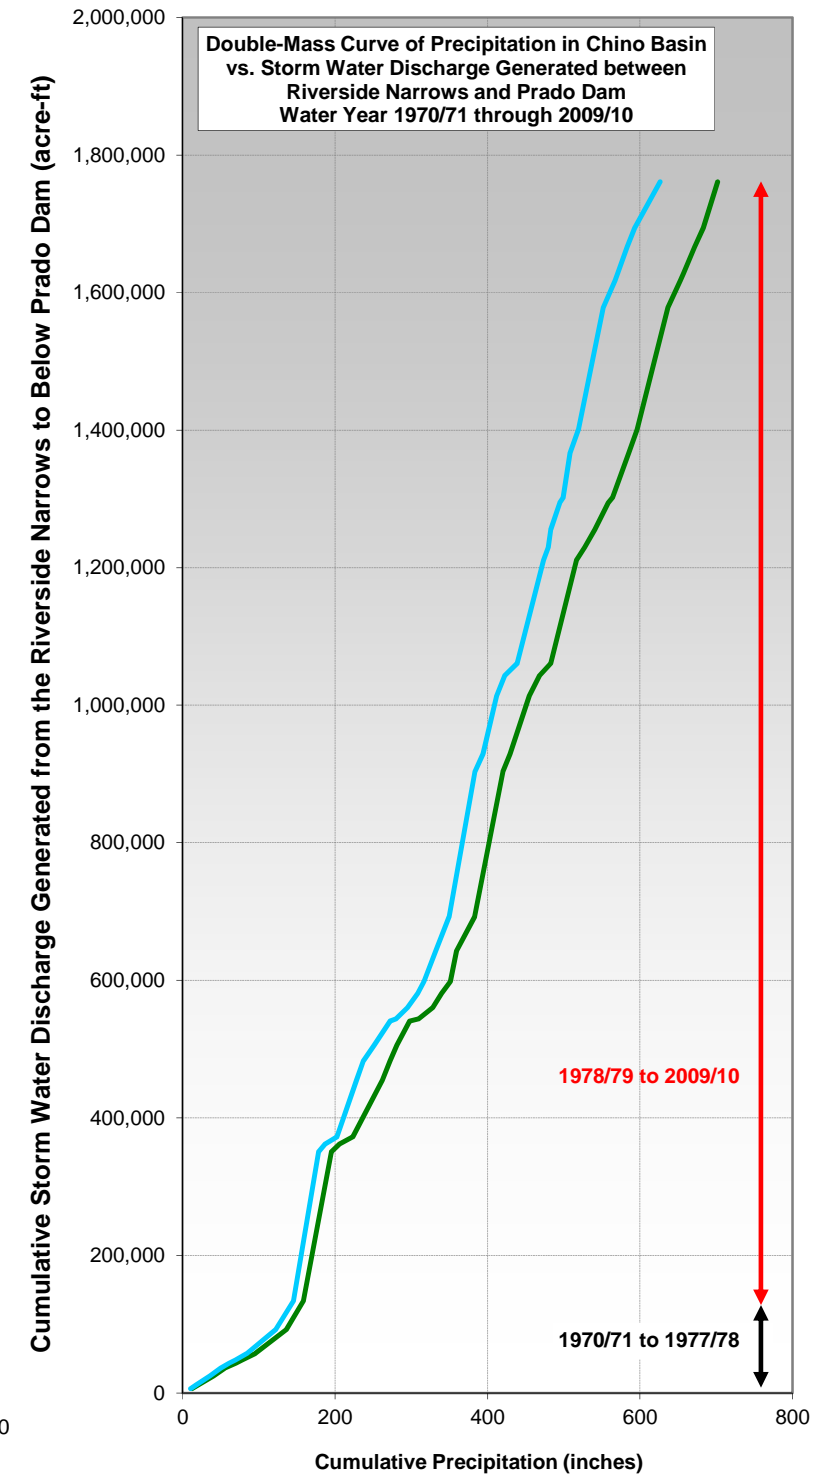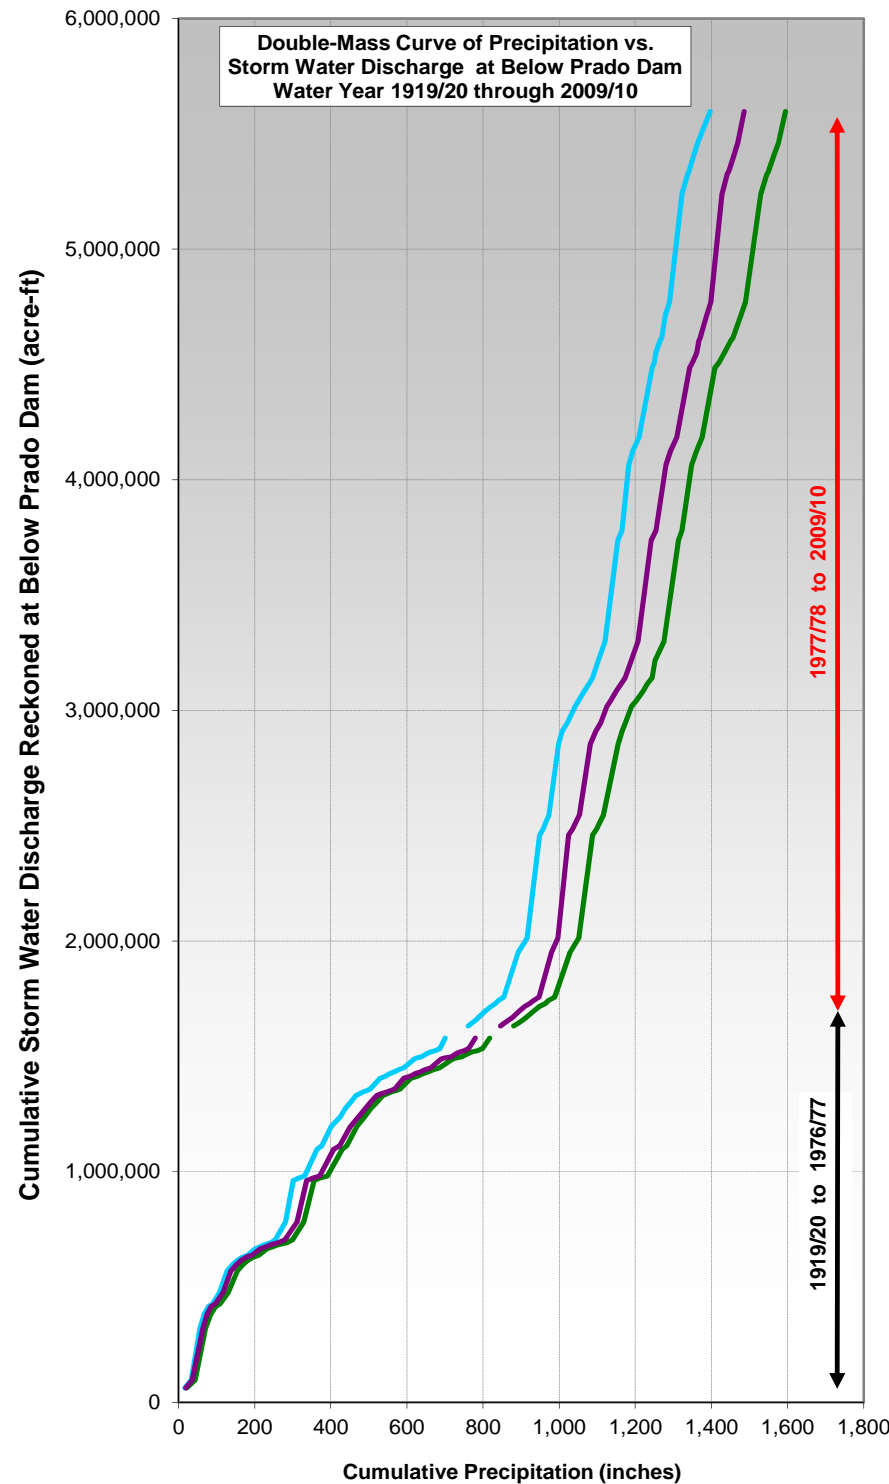

Produced by:

WILDERMUTH
ENVIRONMENTAL INC.
23692 Birtcher Drive
Lake Forest, CA 92630
949.420.3030
www.wildermuthenvironmental.com
Author: SSA
Date: 20110620
File: Exhibit_4.gpj

- Cumulative Departure from Mean Precipitation (Ontario Station)
- Storm Water at Prado Dam

- Cumulative Precipitation at Montclair
- Cumulative Precipitation at Ontario
- Cumulative Precipitation at San Bernardino Hospital



2010 State of the Basin
General Hydrologic Conditions

Relationship of Precipitation and
Storm Water Discharge in the Chino Basin
1919/20 - 2009/10

Exhibit 5